


# GNY PORTABLE HOSE TESTER

## MODEL 2488A

GNY portable hose tester is a hand-operated, self contained unit brings the test stand to the equipment and gives you an accurate check on any size hose.

The compact, lightweight test unit features aluminum tank construction, shut-off and bleed valves and gauge range from 0-600 psi. It is easily carried and operated by one man. Gauge calibration adjustable in the field.

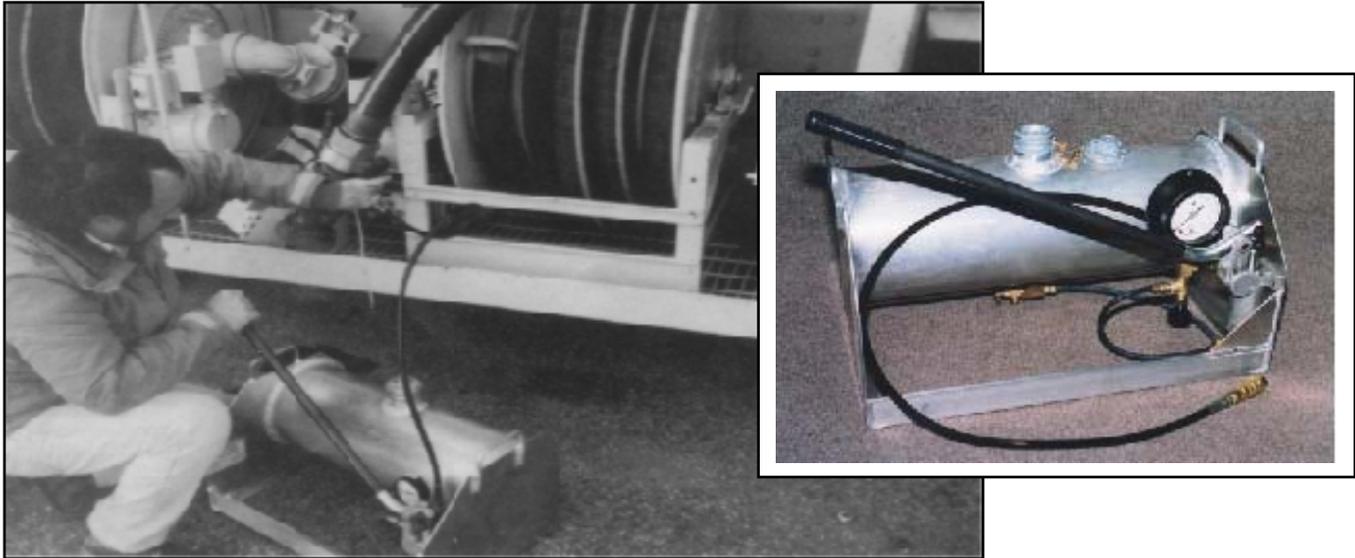

**Minimize equipment down time with on-site hydrostatic hose tests**

### SPECIFICATIONS

**TANK :** 5 gallon capacity, aluminum welded construction with shut-off and bleed valves.

**PUMP :** Aircraft type, hand operated hydraulic pump with built-in check valve, removable handle and viton® seals.

**OPERATING PRESSURE:** 600 PSI

**PUMP CAPACITY:** 2 cub. inch per cycle.

**PUMP DISPLACEMENT:** 0.25 gpm @ 30 CPM @ 1500psi

**HANDLE TORQUE:** 1100 in. lbs.

**GAUGE:** 2 ½ inch dia. 0–600 PSI – with Certificate of Calibration

**EST. WEIGHT:** 45 lbs.

4 ft. flexible hose is furnished with each unit. Adapters can be supplied for any type hose and coupling. Unit is shipped completely assembled.

## **GNY EQUIPMENT, INC.**

20 DREXEL DRIVE, BAY SHORE, NEW YORK 11706, USA

Phone: (631) 273 4940 • Fax: (631) 273 5018

Email: [gnyequip@gnyequipment.com](mailto:gnyequip@gnyequipment.com)

[www.gnyequipment.com](http://www.gnyequipment.com)